
Iso Electric Focusing



Equipped with rehydration and focusing trays, this system has been optimised to perform first-dimension isoelectric focusing (IEF) with IPG (immobilised pH gradient) strips and IEF gels quickly, easily and reproducibly



WWW.CLEAVERSCIENTIFIC.COM

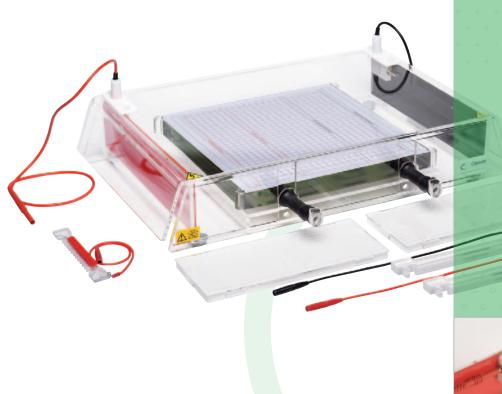

- For IPG strips and IEF gels
- Large cooling platform area
- 'Pick-and-Place' adjustable electrodes
- Focusing tray for a maximum twelve IPG strips
- Rehydration tray also included

Equipped with rehydration and focusing trays, the Cleaver Scientific IEF system has been optimised to perform first-dimension isoelectric focusing (IEF) with IPG (immobilised pH gradient) strips quickly, easily and reproducibly. It can also be used with precast IEF Gels.

An ideal entry-level system for both experienced and occasional IEF users, the unit is versatile enough to meet the needs of laboratories with increased throughput requirements as well as first time users.

HIGH CAPACITY

Its high-capacity focusing tray accommodates up to twelve IPG strips. Adjustable 'pick-and-place' electrodes clip conveniently anywhere within the focusing tray to resolve IPG strips 7-24cm in length and are colour-coded to prevent polarity reversal. The Electrode frame clips directly on to the cooling plate and includes adjustable electrodes to run horizontal precast IEF and PAGE gels.


A cooling plate, manufactured from a special grade ceramic in a large 26x26cm surface area, facilitates effective heat dissipation and control, particularly during high voltage IEF techniques. An optional, but recommended, recirculating chiller connects quickly and easily to the cooling plate to maintain optimal operating temperatures for IPG strips and precast gels.

REHYDRATION

The Rehydration tray allows convenient transfer of IPG strips to the focusing tray without time-consuming removal of residual rehydration buffer and also enables the focusing tray to remain permanently in use for IEF to maximise throughput and provides useful storage at -20°C for focused strips before second-dimension runs.

For those requiring a power supply, the Consort EV3330, 3000V, 300mA, 300W enables desired Volt-hours for focusing to be attained faster at maximum voltage.

Isoelectric Focusing



IEF COMPONENTS

- 1. Focusing Tray
- 2. Adjustable 'pick-and-place' electrodes
- Ceramic cooling plate with snap-lock
 connectors
- 4. Rehydration tray (not shown)
- 5. Electrode frame for horizontal precast gels
- 6. Shrouded 2mm high voltage cables (not shown)

Typical Running Conditions 7cm IPG Strip							
1	2	3	4	5	6		
150	300	600	1500	3000	300		
0.5	0.5	0.5	0.5	2.5	<20		
75	150	300	750	7500	-		
18cm IPG Strip							
1	2	3	4	5			
300	600	1500	3000	300			
0.5	1	1	12	<20			
150	600	1500	36000	-			
	1 150 0.5 75 trip 1 300 0.5	ip 1 2 150 300 0.5 0.5 75 150 trip 1 2 300 600 0.5 1	ip 1 2 3 150 300 600 0.5 0.5 0.5 75 150 300 trip 1 2 3 300 600 1500 0.5 1 1	ip 1 2 3 4 150 300 600 1500 0.5 0.5 0.5 0.5 75 150 300 750 trip 1 2 3 4 300 600 1500 3000 0.5 1 1 12	ip 1 2 3 4 5 150 300 600 1500 3000 0.5 0.5 0.5 0.5 2.5 75 150 300 750 7500 trip 1 2 3 4 5 300 600 1500 3000 300 0.5 1 1 12 <20		

	IPG Strip Length			
Tray Specifications	7cm	11cm	18cm	24cm
FOCUSING TRAY				
ELECTRODE DISTANCE	6.5см	10.2см	17.1см	22.7см
MAXIMUM STRIP LENGTH ACCOMMODATED	25.3см	25.3см	25.3см	25.3см
IPG STRIP LENGTH	7см	11см	18см	24см
REHYDRATION TRAY				
MAXIMUM STRIP LENGTH ACCOMMODATED	24см	24см	24см	24см
RECOMMENDED VOLUME FOR STRIP REHYDRATION	3.5ML	6мь	8.0ML	12.0мь

ORDERING INFORMATION						
Cat. No.	Description					
CSL-IEF	Flatbed IEF system for IPG strips and gels, with focusing and rehydration trays					
CSL-CHILLER	Chiller system, -20 to 100°C, including insulated tubing & clips	CSL-IEFFRME Replacement electrode frame				
CSL-IEF-KIT	1-D Combination Package, includes IEF, CHILLER and EV3330	CSL-RHYDTRY Rehydration Tray				
CSL-IEFPOS	Replacement positive electrode	CSL-FOCUSTRAY Focusing tray with adjustable electrodes				
CSL-IEFNEG	Replacement negative electrode	EV3330 Consort 3000V, 300mA, 300W power supply				
CSL-IEFPLT	Replacement Glass platform					